

Steam / Hot / Cold Water – Self Contained: Diesel Heated, Gas Engine

Experience ultimate duty cleaning power. The **SCU Series** has the reserve horsepower and heat rise to get the job done faster, with less soap. It has a rust proof, stainless steel frame and long lasting, quality components to withstand the daily use that a professional demands. The built-in generator has additional capacity to run lights or water recycle accessories and you can also carry water with the optional ProTowWash trailer for total self-containment.

| | |
|--------------------------|--|
| PRESSURE | 3500psi |
| FLOW CAPACITY | 4.5gpm |
| OUTLET TEMP | Panel mounted adjustable temperature to 250°F (140° + rise) |
| POWER/ENGINE | 18hp Vanguard |
| ENGINE FUEL/CAP | Unleaded gasoline, 18 gallons for extended runtime, up to 2 days |
| CONTROLS/SWITCHES | Lighted on/off switches, hour meter, adj. thermostat, soap control, aux. power, pressure gauge |
| PUMP | Cat Pump |
| POWER DRIVE | V-belt, low RPM-cooler, quieter, continuous duty performance. Easy Tension Rails |
| PRESS. CONTROL | Total relief unloader, 0-5000psi gauge, safety burst disc, relief valve, pressure switch |
| WATER SUPPLY | 4 Gal. float tank, double inlet filtration, 3 way inlet valve |
| PRESSURE HOSE | 3/8" x 50' double steel wire braid, 250°F rated, 5800psi, non-marking hose |
| GUN/WAND | 48" molded insulator wand with multi-nozzle holder and quick coupler |
| SOAP INJECTION | Full pressure inlet injection, stainless precision metering valve |
| NOZZLE | #4.5(15°,40°) #4.0 (25° Steam) |
| BURNER COIL | 1/2" sch 80 steel coil, 4 pancake, ceramic blanket insulation, double wall stainless enclosure |
| BURNER/POWER | Oil Fired, 115v, Automatic Ignition, Fuel Filter w/Water Separator, Fuel Solenoid |
| BURNER FUEL/CAP | Diesel Fuel #1 or #2, Kerosene, or fuel oil, 18 gallons |
| GENERATOR | On-board 2900 watt, 115v generator for auxiliary power |
| CONSTRUCTION | Stainless 1 1/4" tube frame, 14 gauge base, stainless panel and coil wrap |
| WHEELS | Optional wheel kit available |
| WEIGHT/DIMENSION | 590#, 48"x38"x41" |

Specifications subject to change without notification & may vary due to ambient conditions

Featuring...


- ✓ **Safe to use** flow sensitive unloader builds up pressure gradually to reduce gun recoil and relieve trapped pressure
- ✓ **More Standard Controls** incl. 3-way inlet valve, hour meter, pressure gauge, soap injection, lighted on/off switches, auxiliary power switch, and thermostat with steam.
- ✓ **Rust Proof Construction**-Stainless steel lifetime guarantee

Options...

Wheel Kit 13" w/ pull bar steering (AHB12), locking kit for wheels (AHB20), Downstream injection kit (AC340), Trailer, Tank Skid, Hydro Vacuum wastewater recovery



ETL Listed
 Certified to UL 1776
 Certified to
 CAN/CSA B140.11

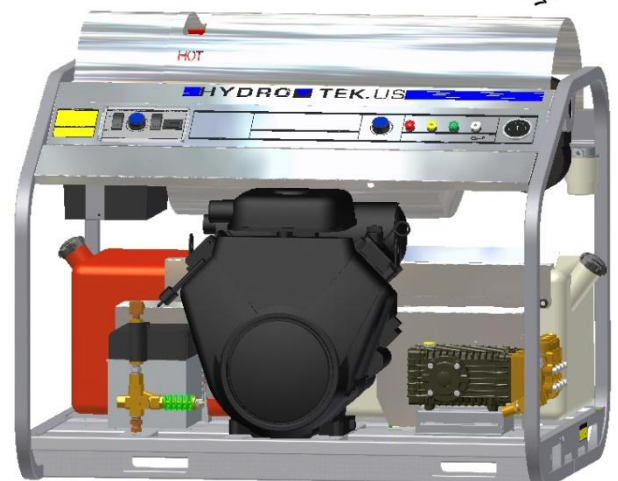

TO: _____

COMMENTS: _____

YOUR PRICE: _____

DISTRIBUTED BY: _____